


DOOR AND FRAME SCHEDULE

#	DOOR				HARDWARE				FRAME			REMARKS						
	NOMINAL SIZE		M.T.L.	TYPE	GLASS	FINISH	LABEL	ROOM ID	CLOSER	PANIC	LEVER		LATCH	LOCK	GROUP	M.T.L.	FINISH	DET. NO. ON SHT. A-5.2
	WIDTH	HT																
D1	3'-0"	6'-8"	1-3/4"	SCW	B	STN												
D2	3'-0"	6'-8"	1-3/4"	SCW	B	STN												
D3	3'-0"	6'-8"	1-3/4"	SCW	B	STN												
D4	3'-0"	6'-8"	1-3/4"	SCW	B	STN	45M											
D5	3'-0"	6'-8"	1-3/4"	SCW	B	STN												
D6	3'-0"	6'-8"	1-3/4"	SCW	B	STN												
D7	3'-0"	6'-8"	1-3/4"	SCW	B	STN	45M											
ED	3'-0"	7'-0"	1-3/4"	HOW		(E)												


DOOR TYPES

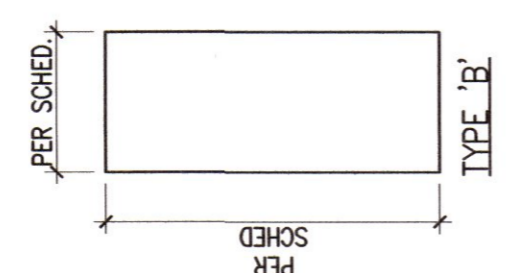

WINDOW / GLAZING SCHEDULE

WINDOW MARK	NOMINAL SIZE		M.T.L.	FINISH	GLAZING	TYPE	DETAILS-A5.2			RATING	REMARKS
	WIDTH	HEIGHT					HEAD	SILL	JAMB		
	W1	W2	ED	CA	CT	A	5	6	5		
	6'-0"	3'-0"	ALUM	CA	CT	A	5	6	5		REPLACE (E) WINDOW
	6'-0"	4'-0"	ALUM	CA	CT	A	5	6	5		REPLACE (E) WINDOW
											EXISTING WINDOW TO REMAIN

WINDOW TYPES

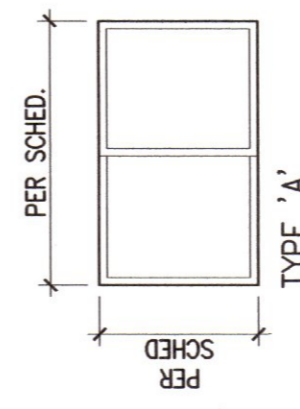

NOTES and ABBREVIATIONS

- DOOR GENERAL NOTES:**
- ALL DOOR TYPES SHALL BE OBTAINABLE FROM THE INSIDE AT ALL TIMES WITHOUT THE USE OF A KEY, THUMB TURN, OR ANY SPECIAL KNOWLEDGE OR EFFORT.
  - ALL OTHER NON-EXIT DOORS TO BE EQUIPPED WITH SINGLE EFFORT, NON GRASP HARDWARE CENTERED BETWEEN 34" MIN. AND 44" ABOVE FINISHED FLOOR.
  - VERIFY ALL STUD OPENINGS PRIOR TO FABRICATION OF FRAMES.
  - PROVIDE ACCESSIBLE ROOM IDENTIFICATION SIGNAGE AS PER SIGNAGE DETAILS AT ALL RESTROOM DOORS.
  - DOOR LABELS TO BE INSTALLED ON PUSH SIDE OF DOORS. REFER TO HARDWARE SPECIFICATIONS.
  - PRE-RATING TIME PERIOD IN MINUTES.
  - FINISHED GLAZING TO BE #1 REFLECTIVE GRAY.
- WINDOW TYPES:**
- HW = HOLLOW METAL  
 AL = ALUMINUM  
 CT = CLEAR TEMPERED SAFETY GLAZING  
 FT = FACTORY FINISH  
 ST = STEEL  
 TM = TIMELY FRAMES  
 CA = CLEAR ANODIZED  
 SCW = SOLID CORE WOOD  
 DLT = DUAL TEMPERED GLAZING  
 STN = CLEAR FINISH ON MARBLE VENEER
- DOOR ACCESSIBILITY REQUIREMENTS:**
- DOOR THRESHOLDS SHALL COMPLY WITH SEC. SECTION 11B-303.
  - DOOR CLOSING SPEED: THE CLOSERS SHALL BE ADJUSTED SO THAT FROM AN OPEN POSITION OF 90 DEGREES, THE TIME REQUIRED TO MOVE THE DOOR TO A POSITION OF 12 DEGREES FROM THE LATCH IS 5 SECONDS.
  - ALL OTHER NON-EXIT DOORS TO BE ADJUSTED SO THAT FROM THE OPEN POSITION TO THE CLOSED POSITION, THE DOOR OR GATE SHALL MOVE TO THE CLOSED POSITION IN 1.5 SECONDS.
  - THE FORCE FOR PUSHING OR PULLING A DOOR OR GATE SHALL BE AS FOLLOWS:  
 3A. INTERIOR HINGED DOORS AND GATES: 5 POUNDS  
 3B. SLIDING OR FOLDING DOORS: 5 POUNDS  
 3C. REFRIGERATED DOORS: 5 POUNDS  
 3D. REFRIGERATED DOORS: 5 POUNDS  
 3E. EXTERIOR HINGED DOORS: 5 POUNDS MAXIMUM
  - SLIDING DOORS AND GATE SURFACES WITHIN 10 INCHES FROM THE FINISHED FLOOR OR GROUND MEASURED VERTICALLY SHALL HAVE SMOOTH SURFACE ON THE PUSH SIDE EXTENDING THE FULL WIDTH OF THE DOOR OR GATE. PARTS CREATING HORIZONTAL OR VERTICAL JOINTS IN THESE SURFACES SHALL BE WITHIN 1/8 INCH OF THE SAME PLANE AS THE OTHER AND BE FREE OF SHARP OR ABRASIVE EDGES. EXCEPTIONS:  
 1. SLIDING DOORS SHALL NOT BE REQUIRED TO COMPLY WITH SECTION 11B-404.2.10  
 2. THE LEADING EDGE OF THE DOOR OR GATE SHALL BE FREE FROM THE HORIZONTAL. SHALL NOT BE REQUIRED TO MEET THE 10 INCH BOTTOM SMOOTH SURFACE REQUIREMENT.  
 3. DOORS AND GATES THAT DO NOT EXTEND TO WITHIN 10 INCHES OF THE FINISHED FLOOR OR GROUND SHALL NOT BE REQUIRED TO COMPLY WITH SECTION 11B-404.2.10.
  - OPERABLE PARTS OF DOORS SHALL COMPLY WITH SECTION 11B-309.

ROOM FINISH SCHEDULE

NO	ROOM NAME	FLOOR FN	WALL MAT'L				WALLS	CEILING HT	REMARKS
			NORTH	EAST	SOUTH	WEST			
101	RECEPTION	VCT	RB	GB	GB	GB	8'-0"		
102	OFFICE 2	CT	RB	GB	GB	GB	8'-0"		
103	WEIGHT ROOM	CT	RB	GB	GB	GB	8'-0"		
104	BUNK ROOM	CT	RB	GB	GB	GB	8'-0"		
105	OFFICE 1	CT	RB	GB	GB	GB	8'-0"		
106	BATHROOM	SV	SVC	GB	GB	GB	8'-0"		
107	BATHROOM	SV	SVC	GB	GB	GB	8'-0"		
108	KITCHEN	VCT	RB	GB	GB	GB	8'-0"		
109	DINING ROOM	VCT	RB	GB	GB	GB	8'-0"		
110	PANTRY	VCT	RB	GB	GB	GB	8'-0"		
111	LAUNDRY ROOM	VCT	RB	GB	GB	GB	8'-0"		
112	LOUNGE	CT	RB	GB	GB	GB	8'-0"		
113	MEDICAL SUPPLIES	VCT	RB	GB	GB	GB	8'-0"		
114	HALLWAY	VCT	RB	GB	GB	GB	8'-0"		
115	APPARATUS ROOM	SC	RB	GB	GB	GB	VARIES		

CASEWORK ELEVATIONS

SYMBOL	BASE MATERIAL	FLOOR MATERIAL	WALL MATERIAL	CEILING MATERIAL
RB	4" RUBBER BASE	VCT VINYL COMPOSITION TILE	GB 5/8" GYP. BD. TEXTD FIN. - PTD.	GB 5/8" GYP. BD. TEXTD FIN. - PTD.
SVC	SHEET VINYL COVERED BASE	SV SHEET VINYL FLOORING	EGPT EGGSHELL PAINT	SAC SUSPENDED ACOUSTICAL CEILING SYSTEM
		CT CARPET TILE FLOORING	ISGPT SEMI-GLOSS PAINT	
		SC SEALED CONCRETE		

APPROVED  
 All work to be done in accordance with the approved plans and specifications.  
 11/13/2021  
 J. K. J.



NO	DATE	REVISION